



LINE

Montáž


1

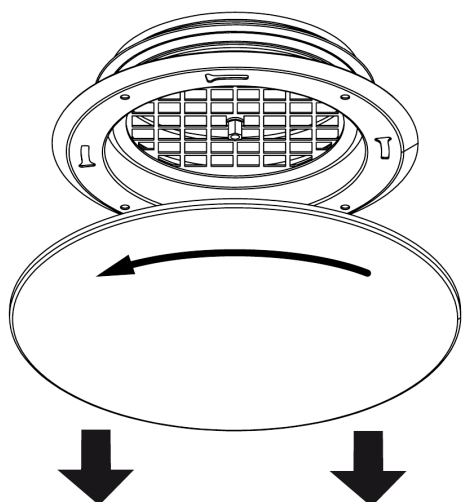


2

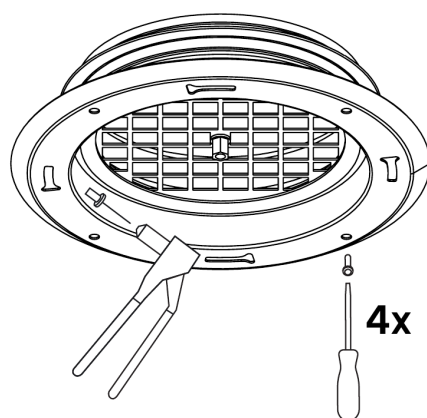

3

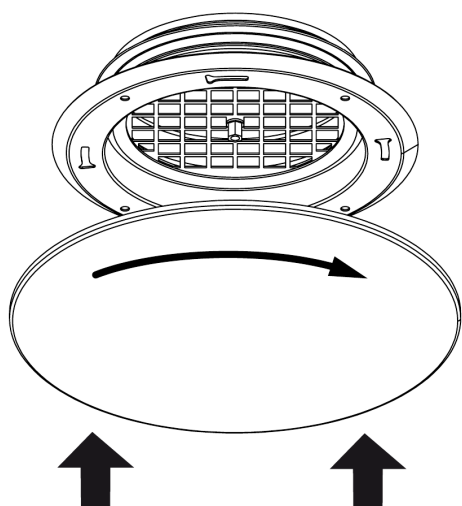


4

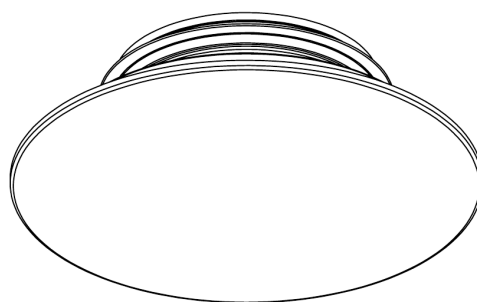


LINE

Údržba


1

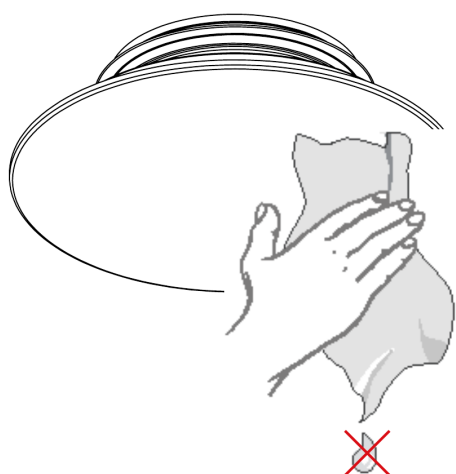


2

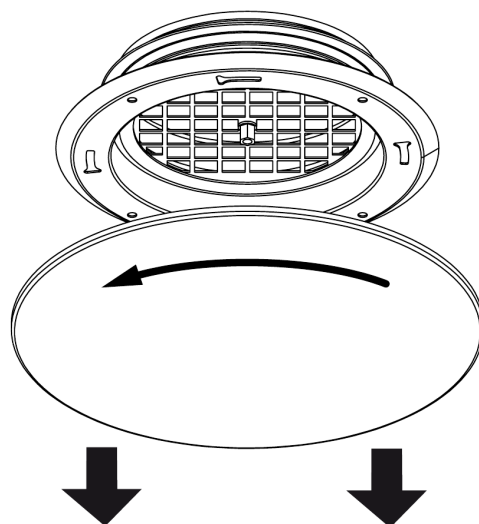

3




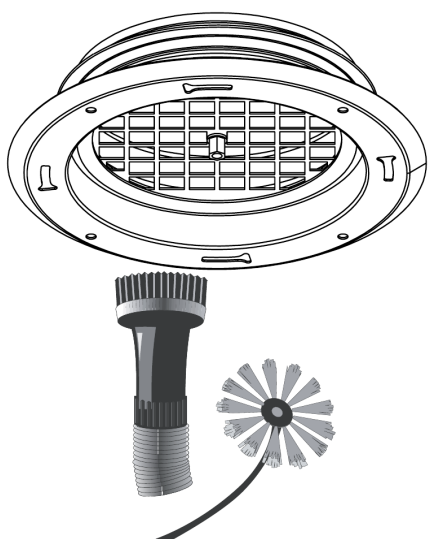


4

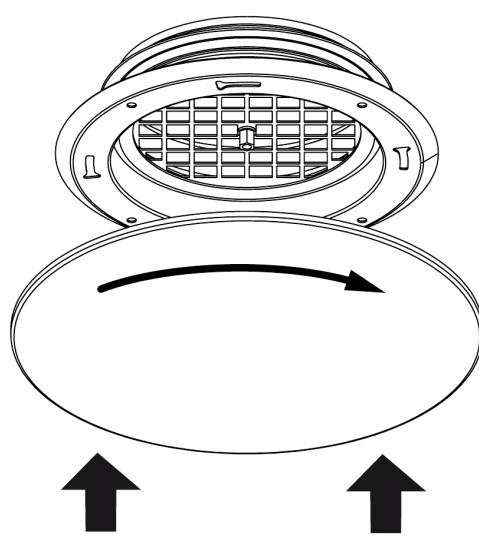

LINE

Seřízení

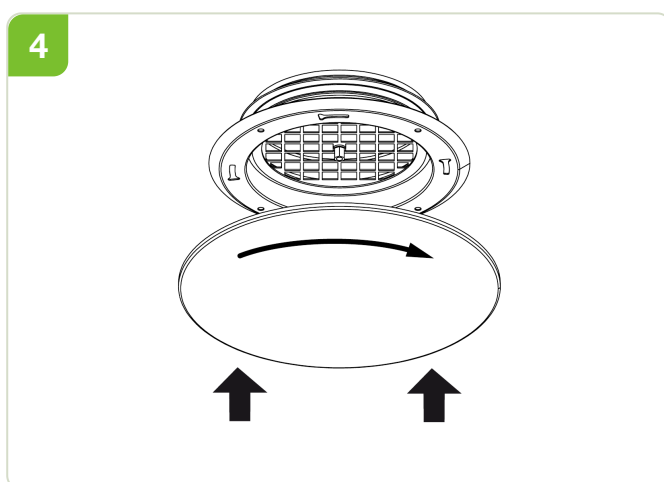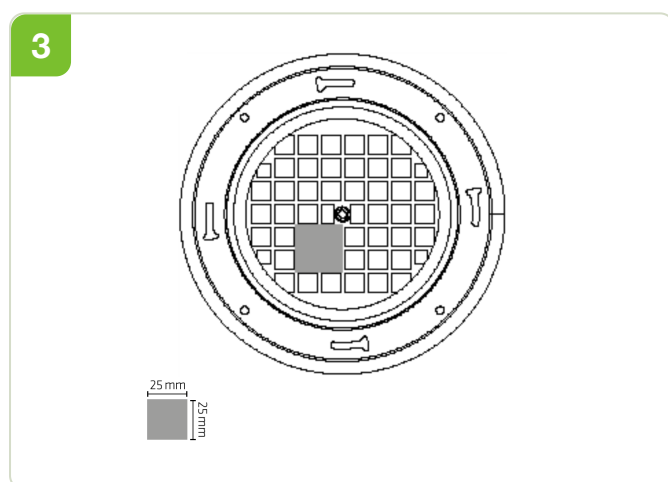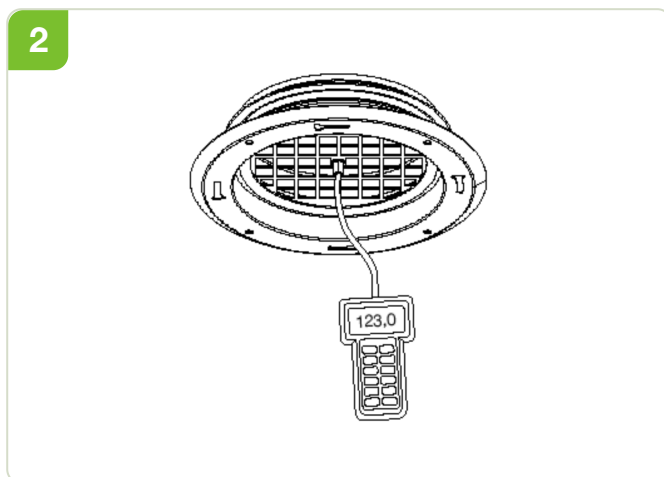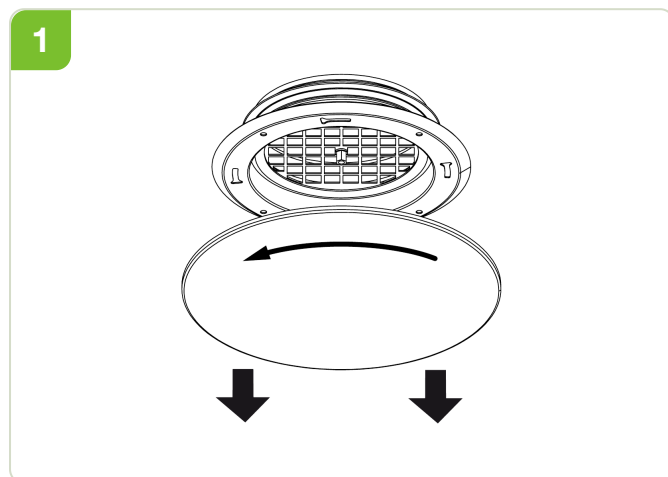

$$q_v = k \cdot \sqrt{\Delta P_m}$$

LINE

25×25 mm ks	k	
	100	125
0	3,14	4,48
1	2,73	4,05
2	2,31	3,70
3	1,96	3,41
4	1,59	3,04
5		2,72
6		2,44

LINEi

25×25 mm ks	k	
	100i	125i
0	3,40	4,90
1	2,89	4,55
2	2,52	4,10
3	2,14	3,80
4	1,78	3,40
5		3,04
6		2,68


LINEi: odvodní vzduch

Levý sloupec udává počet zaslepených polí 25×25 mm.


LINE

Nastavení směru


1



2

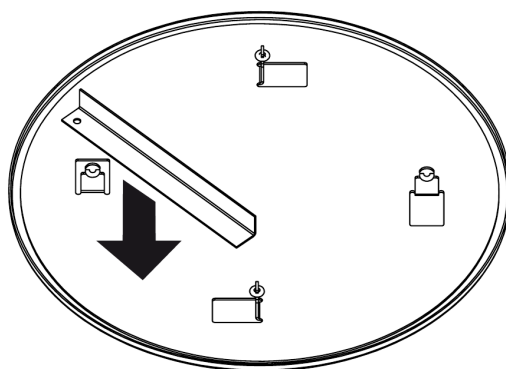


3

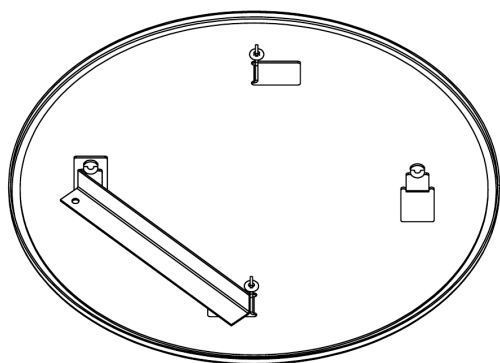

270°

4

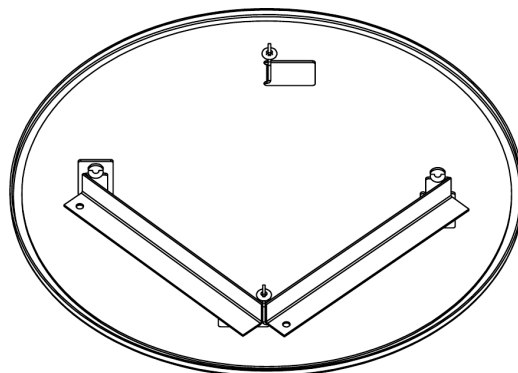


180°


LINE

Výměna viditelné části

1



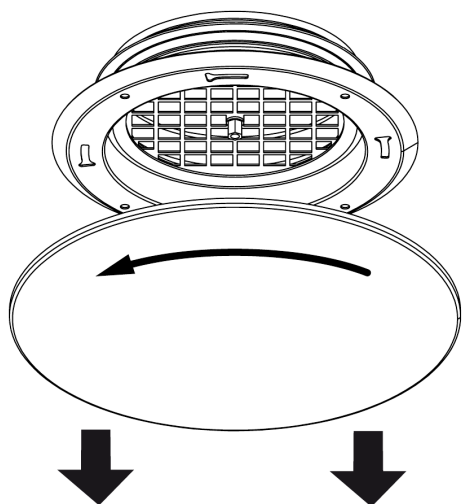


2

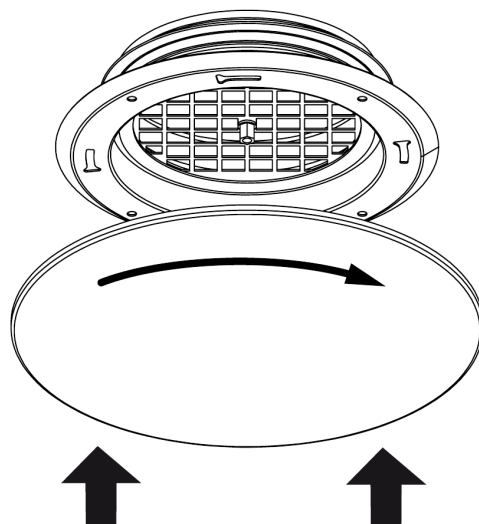

LINE

Přizpůsobení desky

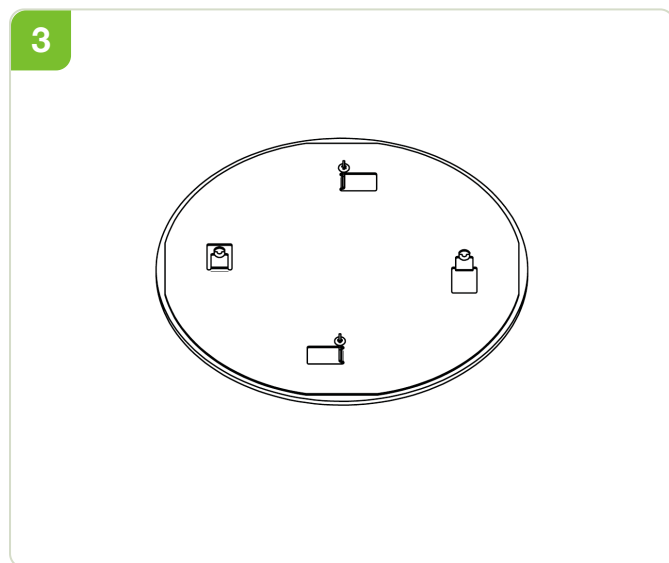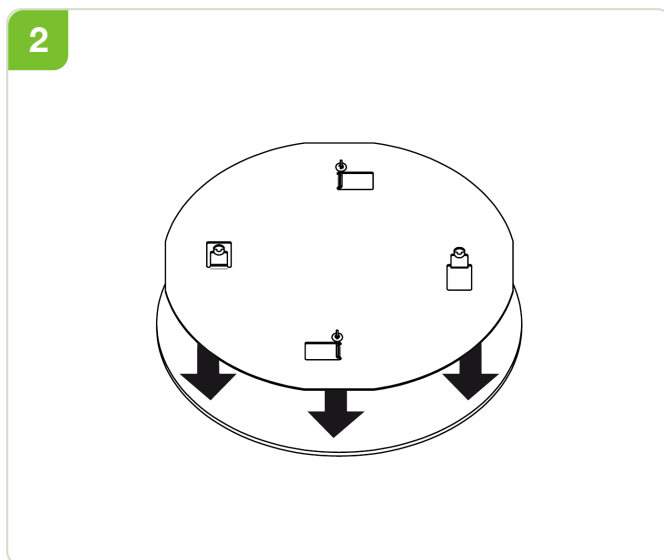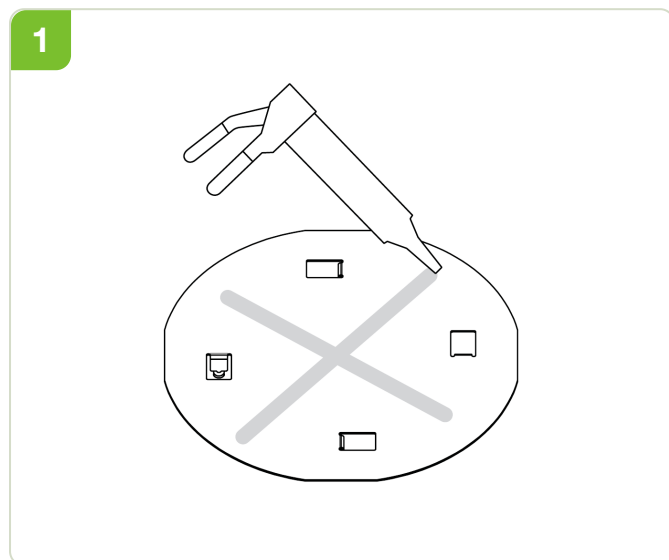

Fixační (lepicí) hmota – např.: Soudal Fix All Turbo

Max. hmotnost desky: 1 kg

Max. rozměry desky:

Kulatá: min. Ø208 mm, max. Ø500 mm

Čtvercová: min. 208×208 mm, max. 500×500 mm